



# Epson Series UV Roll to Roll Printer

3.2米UV卷材打印机 — 高性价比之选


Dual Heads 双喷头

4/ 5/ 6-Color 4/ 5/ 6色写真

Variable Dot 可变墨滴

White & Fluorescent Color Optional

白色&荧光色可选

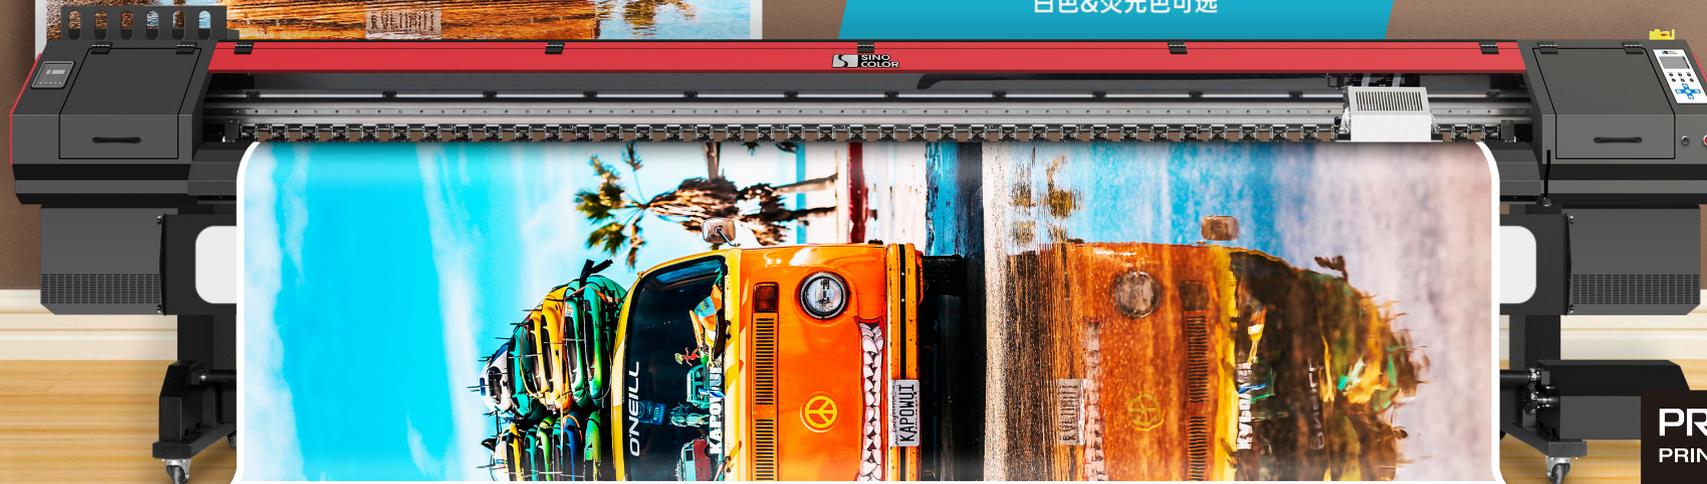

**PRECISIONCORE**  
PRINTHEAD

powered by **EPSON**

# UV Roll to Roll Printer | UV-I260S & UV-I260D

## • Features




### Epson Official Supplied Printheads

Latest Epson Industrial Printhead i3200-U & i1600-U Equipped. Focus on super fast speed printing.



### Water Cooling UV-LED Lamp

It is one of the world's top UV-LED, long lifespan, low heat, and instant on-off



### Variable Dot Print Technology

Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes



### Anti-Collision Function

Anti-collision system is equipped to protect the printhead and carriage all the time



### Advanced Media Handling

With SinoColor advanced movement control system, each pass is uniform allowing for more sellable output in less time

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media.
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination.
- ★ Branded parts are used for high attrition area. Greatly increased the lifetime and stability of the machine. For example, Hiwin guide rail, German Igs drag chain, Italian Megadyne belt.



## • Specification

Model No.		UV-1260S	UV-1260D
Printing Head		2 × Epson i3200-U	2 × Epson i1600-U
Resolution		2400 dpi MAX	
Media	Width	3200 mm MAX	
	Type	Canvas, Leather, PET Film, Reflective Film, Soft Ceiling Film Etc.	
Ink	Type	UV Ink	
	Color	CMYK / CMYK+W	
	Curing	High Quality Water Cooling UV-LED Lamp	
Speed	Printing Mode	CMYK	
	Draft	50 m <sup>2</sup> /h	55 m <sup>2</sup> /h
	Production	28 m <sup>2</sup> /h	30 m <sup>2</sup> /h
	Quality	14 m <sup>2</sup> /h	16 m <sup>2</sup> /h
Cleaning		Automatic Cleaning, Anti-Clogging Flash Function & Capping System	
Feed & TakeUp		Automatic Media Feeding (Standard) & Take up System (Optional)	
Rip Software		Maintop (Standard) / FlexiPRINT (Optional)	
Connector		USB 3.0	
Power		AC 110/ 220V, 50/ 60Hz, 1900W	
Size	Machine	L4530×W710×H1395 mm	
	Packing	L4610×W1000×H740 mm	
Weight	Machine	500 KG	
	Packing	640 KG	

Specifications are subject to change without notice.